Copying Firmware to USB Stick Instructions

Important Note: - Read Instructions Carefully Before Commencing

(1 of 2)

Requirements:-

1. USB Stick – 1GB or Less (Preferably a SanDisk Brand)

Procedure:-

1. Copy & paste “update_demo.tgz” and “safe-kernel.img1” files onto a blank USB Stick (1GB or Less) as shown below.

DO NOT UNZIP FILE.

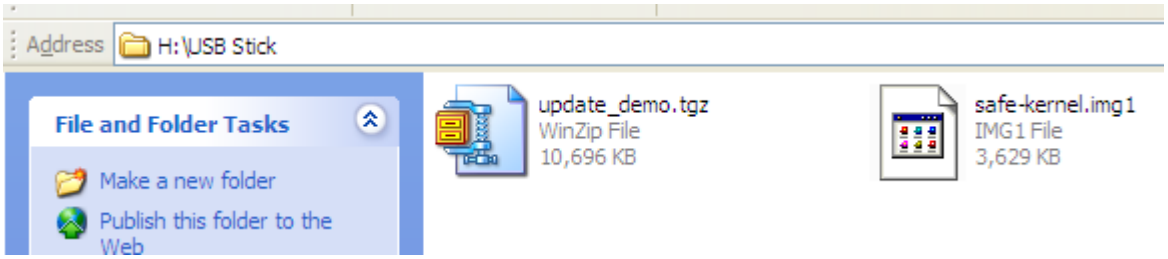

Tevion ALCD3270 Firmware Update Instructions

READ INTRUCTIONS CAREFULLY BEFORE COMMENCING

Step 1. Ensure that the power switch on the TV is in the **"OFF"** position

Step 2. Insert USB Stick into slot provided on side of TV

Step 3. Press power switch on the front of the TV so that it is in the **"ON"** Position.

LED on front will turn RED

Step 4. Press the stand-by button found on right hand side to turn on TV.
The LED on the front will flash and THEN turn BLUE.
Note: - While the firmware is uploading, there will be no picture or on screen display.
The screen will remain blank.

Stand-by button on TV

LED will flash then turn blue!

Firmware will take **7 minutes** to upload.

WARNING: - Do not turn power off or remove USB stick until *7 minutes* has elapsed.

Step 5. After 7minutes, no less, turn the power switch off, remove the USB Stick and turn the TV back on. At this stage there will be no picture, press MENU and retune both Analogue TV and Digital TV tuners. Refer to page 14 of user guide for tuning instructions.